

PowerView™ Model PV750



Features

- CAN-based display with fully modular design
- Customize the bezel, buttons, I/O interface and more
- Configuration software for OEMs available
- Bonded LCD screen viewable in direct sunlight
- Rugged / Reliable Design
- Endless possibilities


The PowerView 750 display features a fully modular design. Any of the major components can be redesigned and assembled to meet your exact needs. It's an incredible amount of customization with minimal non-recurring engineering costs.

You can change the shape of the bezel and buttons. You can rework the I/O board to add extra input. You can add custom graphics and company branding to the interface.

The PowerView 750 display also has configuration software for OEMs available, so you can continue to make quick and easy changes to the onscreen display.

The PV750 display is also highly durable. See the full specs on the back of this sheet for a full overview of its technical features.

Dimensions

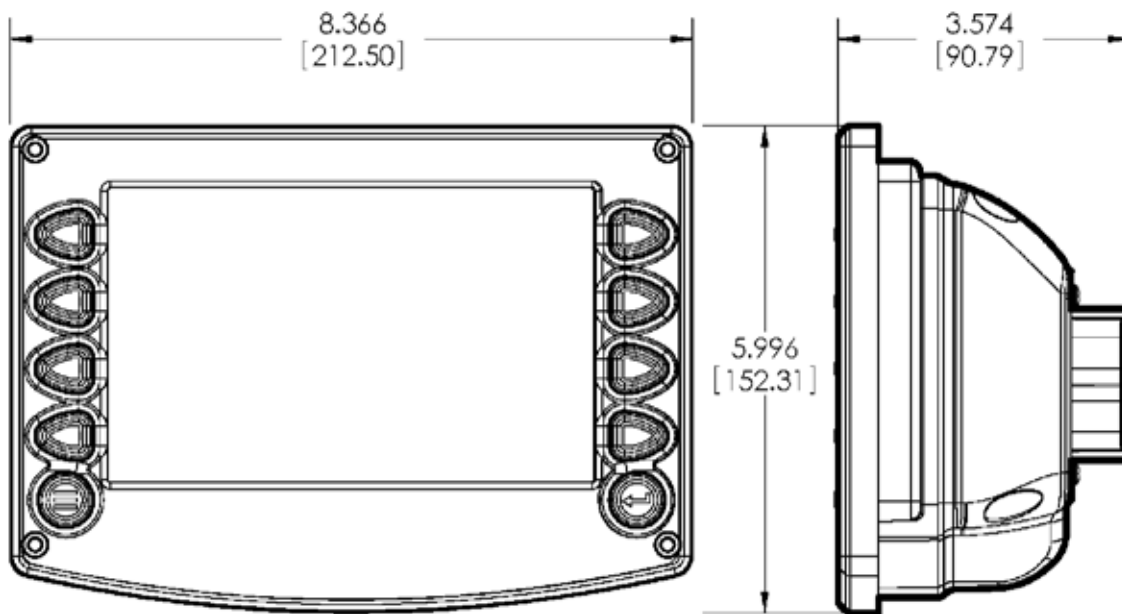

Specifications

Technical

Display: 7" / 178mm color transmissive TFT LCD

Resolution: WGA, 800 x 480 pixels, 16-bit color

Aspect Ratio: 16:9

Orientation: Landscape or portrait

Backlighting: LED, 400-500 cd / mC (50,000 h lifetime)

Microprocessor: Freescale iMX 31 32bit, 400Mhz

QNX Operating System

Flash Memory: 2 GB

RAM: 128 Mbytes SDRAM

SD storage (optional): for program updates, map data, diagnostic data storage

Operating Voltage: 6-35 VDC, protected against, reverse polarity and load-dump

Power Consumption: 10w full backlight; 22w full backlight with heater (<-10 °C)

CAN: 3 CAN ports according to CAN specification 2.0A or 2.0B; one port isolated according to NMEA 2000 (GPS)

RS485: 1 MODBUS Master/Slave port, PVA Gage

Video input: optional NTSC/PAL

Protocols: J1939, NMEA 2000 (GPS), CANOpen protocol support.

Connection: 5 Deutsch DT 6-pin connectors

Keyboard: 10 tactile buttons

USB 2.0 host (full speed)

Inputs: (3) 0-5 VDC analog inputs. (1) input configurable to support measurement frequencies from 2Hz - 10kHz and PWM values from 0-100% duty cycle.

Output Digital: (1) capable of syncing 500mA

Mechanical

Dimensions: 8.37 x 6.0 in. (212.5 x 152.3 mm) landscape

Unit Depth: 3.57 in. (90.8 mm)

Case material: Polycarbonate back case

Environmental

Operating Temperature: -40°C to +85°C

Storage Temperature: -40°C to +85°C

Protection: IP67, front and back.

Emissions: IEC 60945, 95/54/EC

Immunity: SAE J1113, ISO 11452

Vibration: Random vibration, 7.86 Grms (5-2000 Hz), 3 axis

Shock: +/- 50G in 3 axis

FW MURPHY

P.O. Box 470248
Tulsa, Oklahoma 74147 USA
Phone: +1 918 317 4100 Fax: +1 918 317 4266
E-mail: sales@fwmurphy.com

INDUSTRIAL PANEL DIVISION

Fax: +1 918 317 4124
E-mail: ipdsales@fwmurphy.com

MURPHY POWER IGNITION

Web site: www.murphy-pi.com

CONTROL SYSTEMS & SERVICES DIVISION

P.O. Box 1819
Rosenberg, Texas 77471 USA
Phone: +1 281 633 4500 Fax: +1 281 633 4588
E-mail: ccs-solutions@fwmurphy.com

FRANK W. MURPHY LTD.

Church Road, Laverstock
Salisbury, SP1 1QZ, UK
Phone: +44 1722 410055 Fax: +44 1722 410088
E-mail: sales@fwmurphy.co.uk
Web site: www.fwmurphy.co.uk

COMPUTRONIC CONTROLS

41 - 46 Railway Terrace
Nechells, Birmingham, B7 5NG, UK
E-mail: sales@computroniccontrols.com
Web site: www.computroniccontrols.com

www.fwmurphy.com

FW MURPHY INSTRUMENTS (HANGZHOU) CO., LTD.

77 23rd Street
Hangzhou Economic & Technological Development Area
Hangzhou, Zhejiang, 310018, China
Phone: +86 571 8788 6060 Fax: +86 571 8684 8878
E-mail: apsales@fwmurphy.com



USA ISO 9001:2008 FM 20221
UK ISO 9001:2008 FM 29429
CHINA ISO 9001:2008 FM 123811
Registered Facilities

ISO 9001
CERTIFIED

Printed in U. S. A.

02/11/2011

Warranty - A limited warranty on materials and workmanship is given with this FW Murphy product.
A copy of the warranty may be viewed or printed by going to <http://www.fwmurphy.com/warranty>